




SUPER SPACER STANDARD PRODUCT DATASHEET (US)

Super Spacer®

Super Spacer® Standard is a flexible, organic foam spacer technology that provides excellent perimeter insulation for sealed glazing units. Desiccant-filled with pre-applied side adhesive, the structural foam product significantly simplifies insulating glass (IG) production.

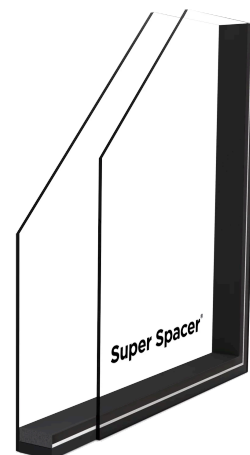

Basic Use

Super Spacer Standard is a dual seal insulating glass spacer system that uses a high-performance acrylic adhesive for its structural seal and is backed with a proprietary multi-layer moisture vapor seal.

Featuring a vapor barrier backing, the spacer must be used in combination with conventional IG sealants.

Colors

Super Spacer Standard is available in Light Grey, Charcoal and Black.

Composition

Foam EPDM (Ethylene Propylene Diene Monomer) base with desiccant pre-fill.

Desiccant Fill

Molecular-sieve.

Continuous Packaged Length

For regular insulating glass production, Super Spacer Standard is supplied on reels with the continuous packaged length varying depending on the spacer width.

Protective Packaging

To provide desiccant protection, the reels are sealed in moisture-proof foil bags. The reels are then shipped in recyclable cardboard boxes.

Technical Services

Your Quanex Representative, in conjunction with your Quanex Technical Service Group, can provide in-plant training and assistance with special applications.


PERFORMANCE

NORM

Thermal conductivity 0.179 W/m ² K	ASTM C 518
Gas / Moisture vapor barrier WVTR < 0.020 gm/m ² /day Oxygen < 0.009 cc/m ² /day	ASTM F 1249 ASTM D 3985
Primary structural seal Acrylic adhesive	–
Fogging No fog in visual area. Pass with hot-melt butyl or curative butyl	ASTM E 2190 EN 1279 – 6 CAN/CGSB 12.8
Gas Retention	EN 1279 – 3
IG Durability	ASTM E 2190 EN 1279 – 2

Warm-Edge Organic Foam Features & Benefits

- Superior organic foam insulation
- Low thermal conductivity
- Substantially reduced perimeter condensation
- Typical overall 0.2 W/m²K (0.04 BTU/h-ft²-°F) U-factor window improvement (vs. aluminum)
- Very good UV resistance
- Excellent high/low temperature performance
- Very good dew-point drop
- Very good compression-set resistance
- Enhanced sound dampening

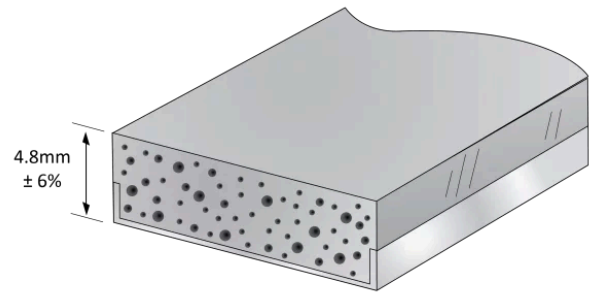

Edge-Seal Durability

- Continuous vapor barrier at corners
- No chemical fogging
- High desiccant capacity.

Reverse Dual-Seal Design

- Outer hot-melt butyl sealant for enhanced gas retention
- Inner structural acrylic side adhesive
- Immediate unit handling
- No cold flow or spacer/seal migration problems.

Improved Productivity

- Fast tape application
- Elimination of desiccant filling
- No corner key assembly
- Simplified production of shaped units
- Limited equipment investment
- High-volume production with reduced labor force.

Pleasing Aesthetic Appearance

- Standard charcoal grey color; good color stability
- Smooth matte surface finish
- No surface blistering or bubbling
- Straight-line application with sharp 90° corners.

REEL SIZES

WIDTH (MM)	WIDTH (INCHES)	METER/REEL	FEET/REEL	METER/AUTO REEL	FEET/AUTO REEL
4.8 mm	0.188"	610	2000	–	–
6.0 mm*	0.236"	460	1509	1380	4528
6.4 mm	0.250"	457	1500	1372	4500
7.9 mm	0.313"	335	1100	1006	3300
8.0 mm*	0.315"	335	1099	1005	3297
9.5 mm	0.375"	305	1000	914	3000
10.0 mm*	0.394"	305	1000	915	3002
11.1 mm	0.438"	274	900	823	2700
11.9 mm	0.468"	244	800	731	2400
12.0 mm*	0.472"	245	804	735	2411
12.7 mm	0.500"	244	800	731	2400
14.0 mm*	0.551"	215	705	645	2116
14.3 mm	0.563"	213	700	640	2100
15.9 mm	0.625"	206	675	617	2025
16.0 mm*	0.630"	205	673	615	2018
17.5 mm	0.688"	183	600	549	1800
18.0 mm*	0.709"	185	607	555	1821
19.1 mm	0.750"	175	575	526	1725
20 mm*	0.787"	155	509	465	1525

*All even metric sizes are not available in North American market.

Note: Tolerances for each nominal size are $\approx \pm 4\%$ for the width (airspace) and $\approx \pm 8\%$ for the height (thickness). All metric dimension equivalent sizes are for reference only.

Terms & Legal Disclaimer

- For all Quanex products, and for other products used with Quanex products, you must follow individual product labels, applicable technical information, and Safety Data Sheets for warnings and precautions before opening packaging and during storage and product use.
- You, including any other user, have sole knowledge and control of factors that can affect the performance of Quanex's products in your intended application. You must conduct tests or analyses to determine the compatibility of Quanex's product with the design, structure, and all materials of your end product, and the suitability of Quanex's product for the method of your application and intended use. You assume all risk and liability arising out of or relating to such use. Quanex makes no representation or warranty that its products are appropriate for all applications. Quanex will not be liable for any failure of its products that results from poor fabrication, improper application techniques, incompatible materials, or from the use of its products in unique, non-standard, or otherwise unsuitable or inappropriate applications.
- Failure to follow applicable guidelines and warnings may result in property and other damage.

Quanex IG Systems

800 Cochran Avenue,
Cambridge, OH 43725

TEL: 800-233-4383

FAX: 740-439-0121

QUANEX.COM

